

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**



Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

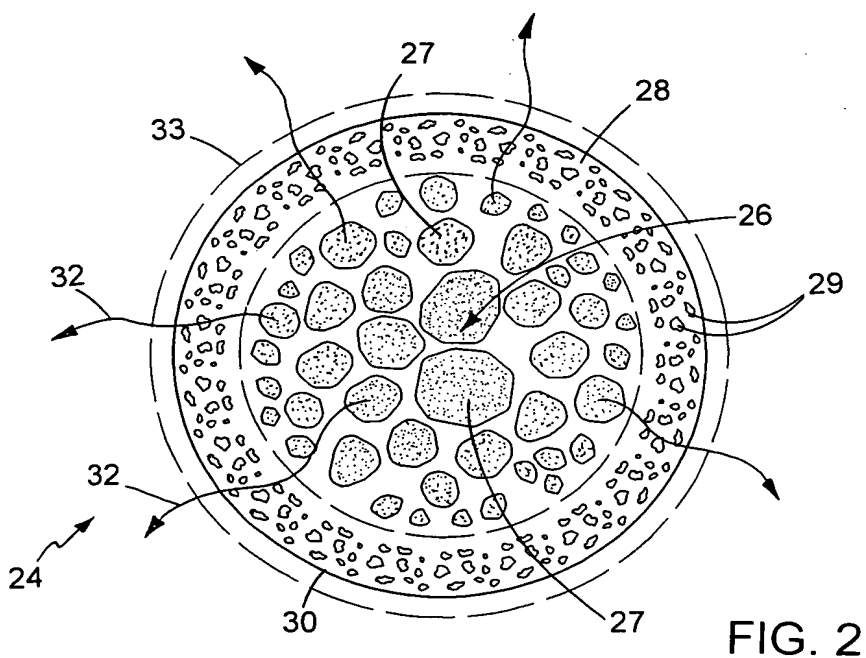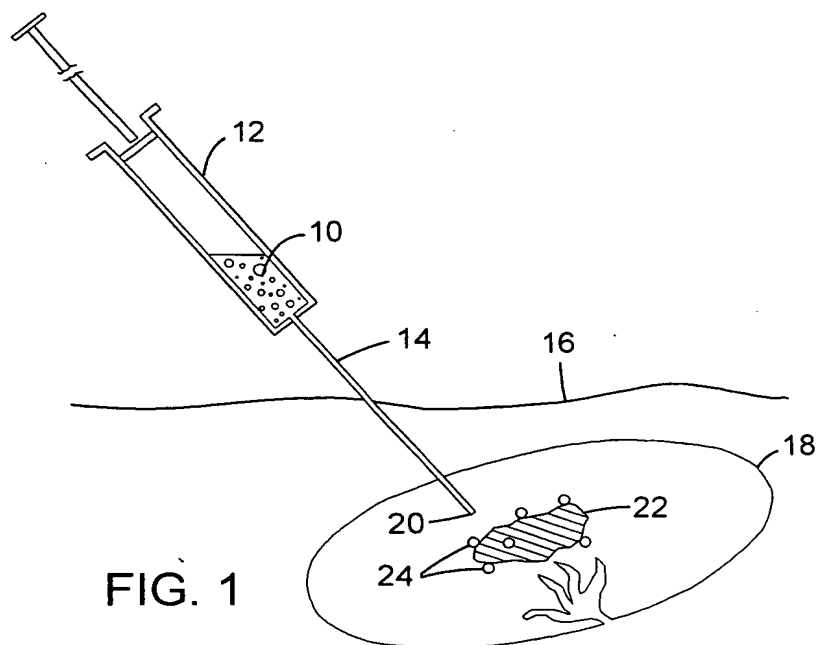

14202 U.S. PTO  
112403

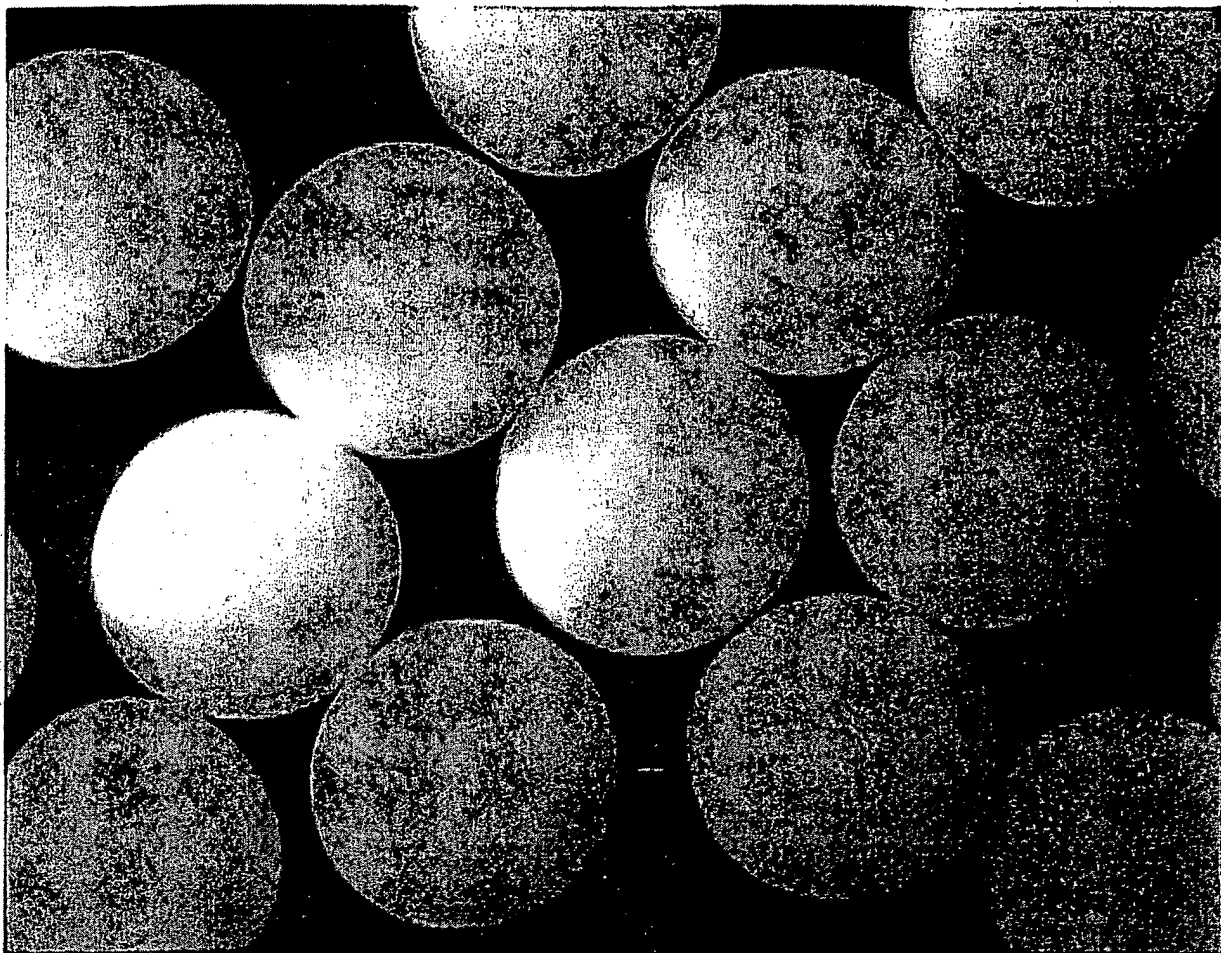


FIG. 3A

14202 U.S. PTO  
112403

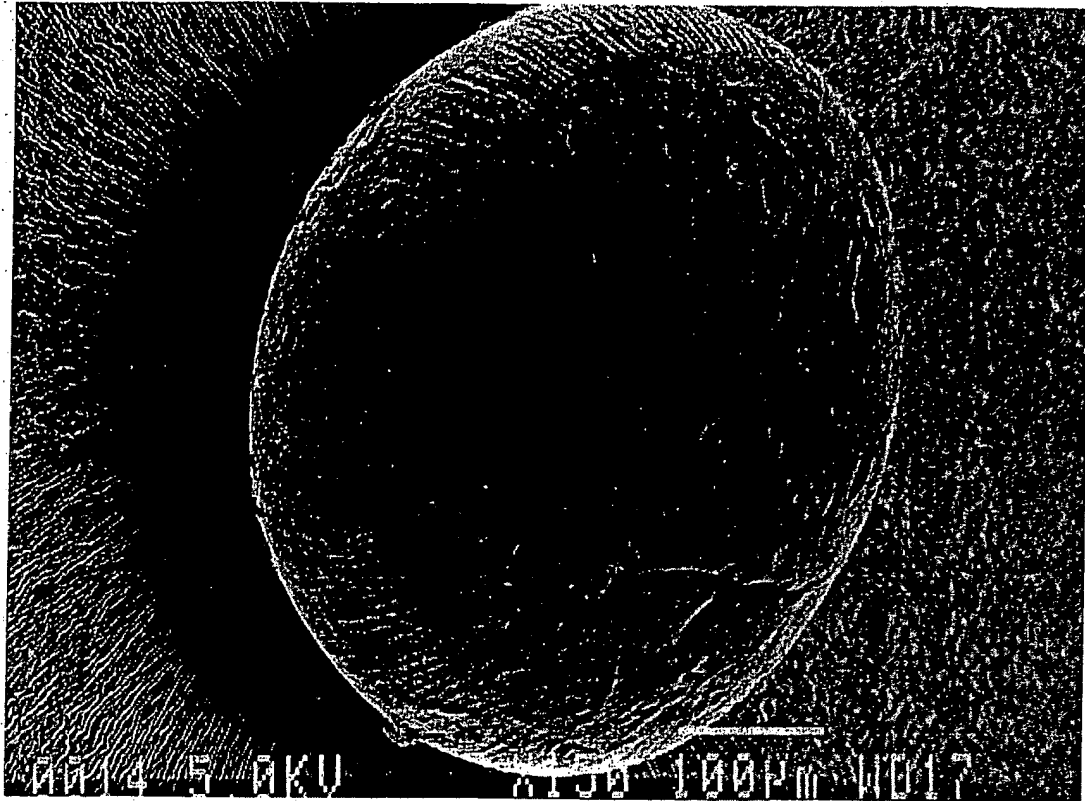


FIG. 3B

14202 U.S. PTO  
112403


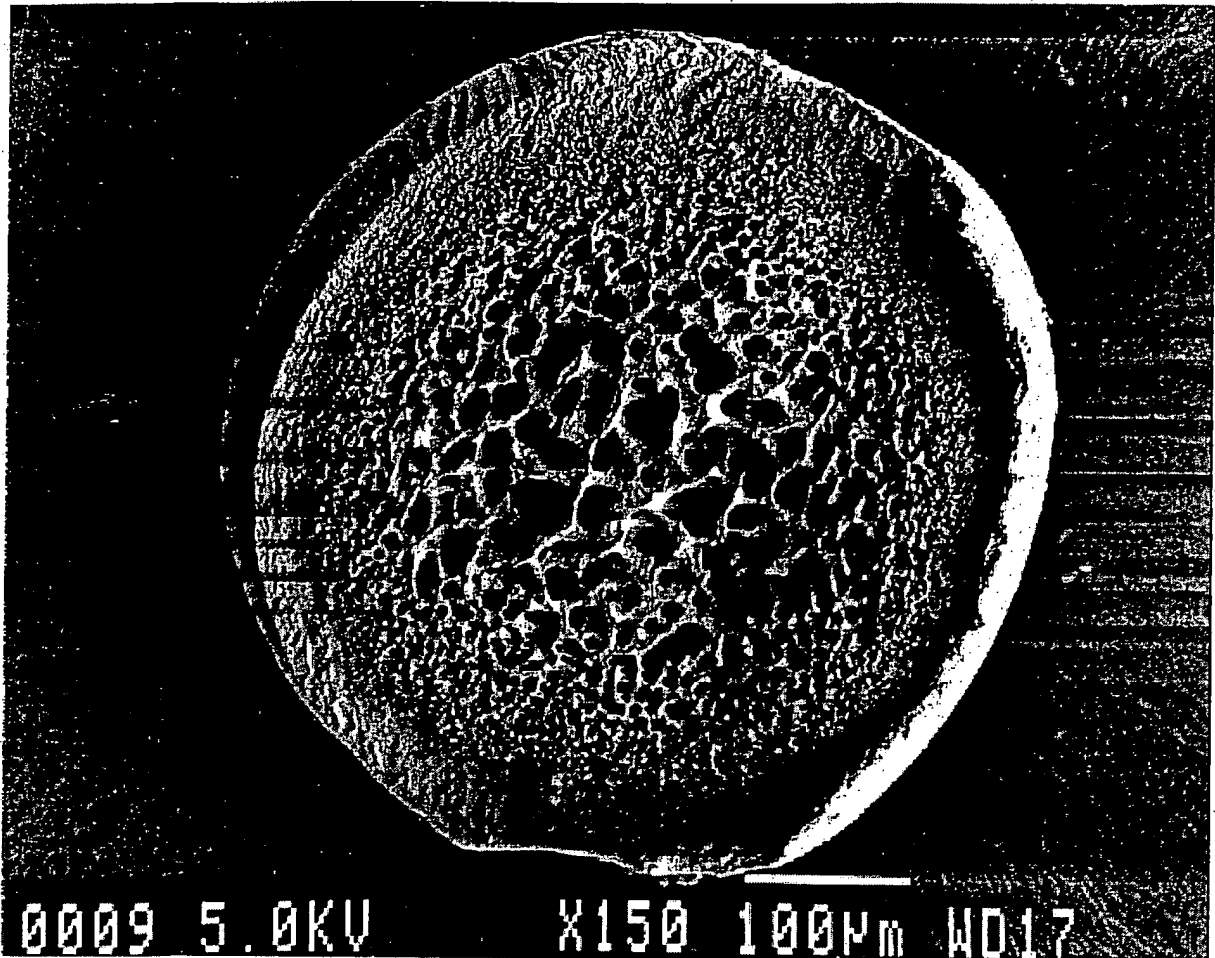


FIG. 3C

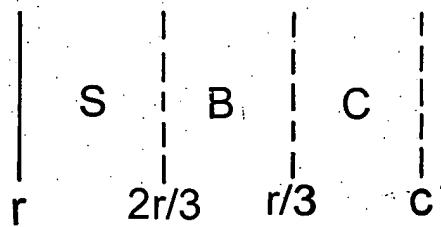

14202 U.S. PTO  
112403

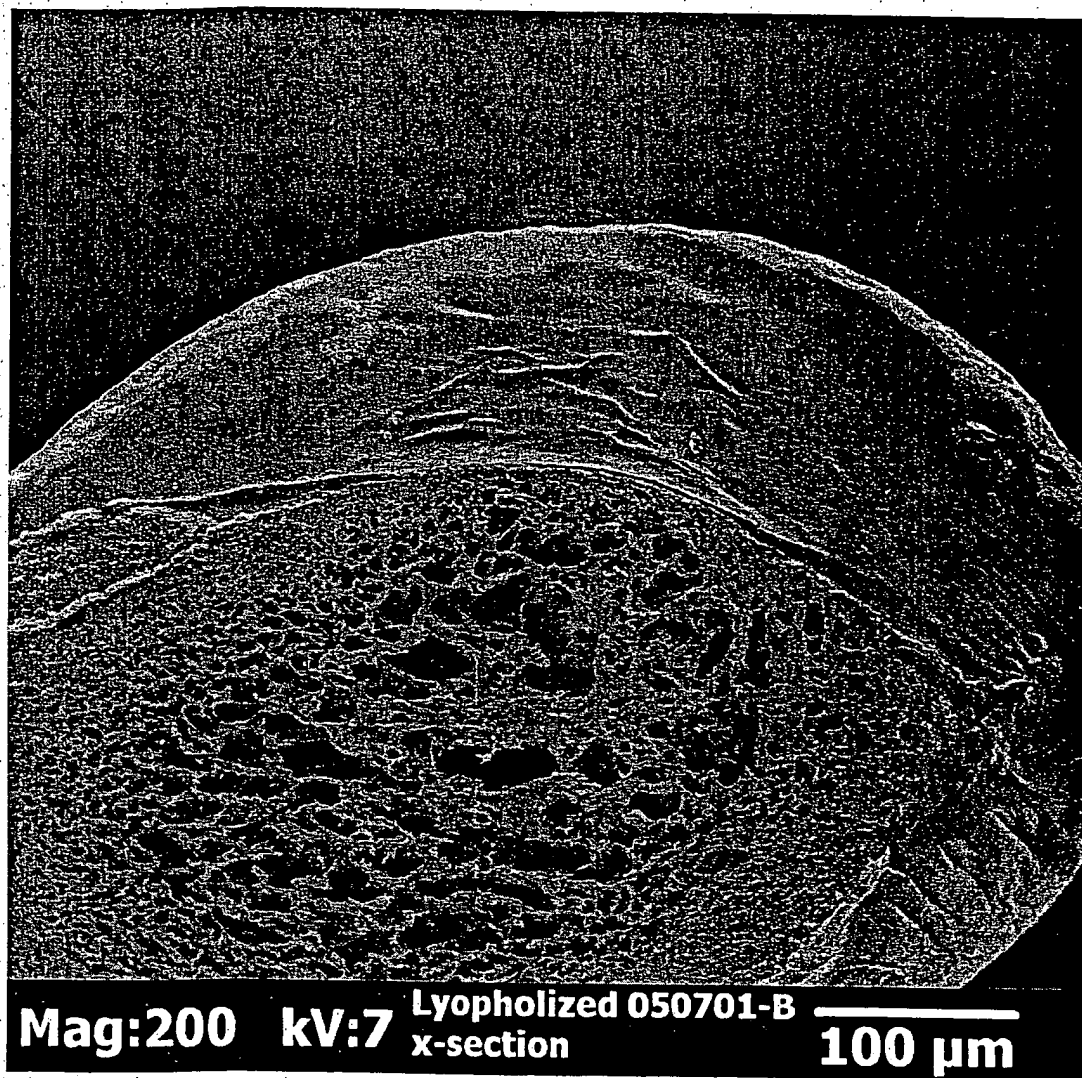


FIG. 3D

14202 U.S. PTO  
112403

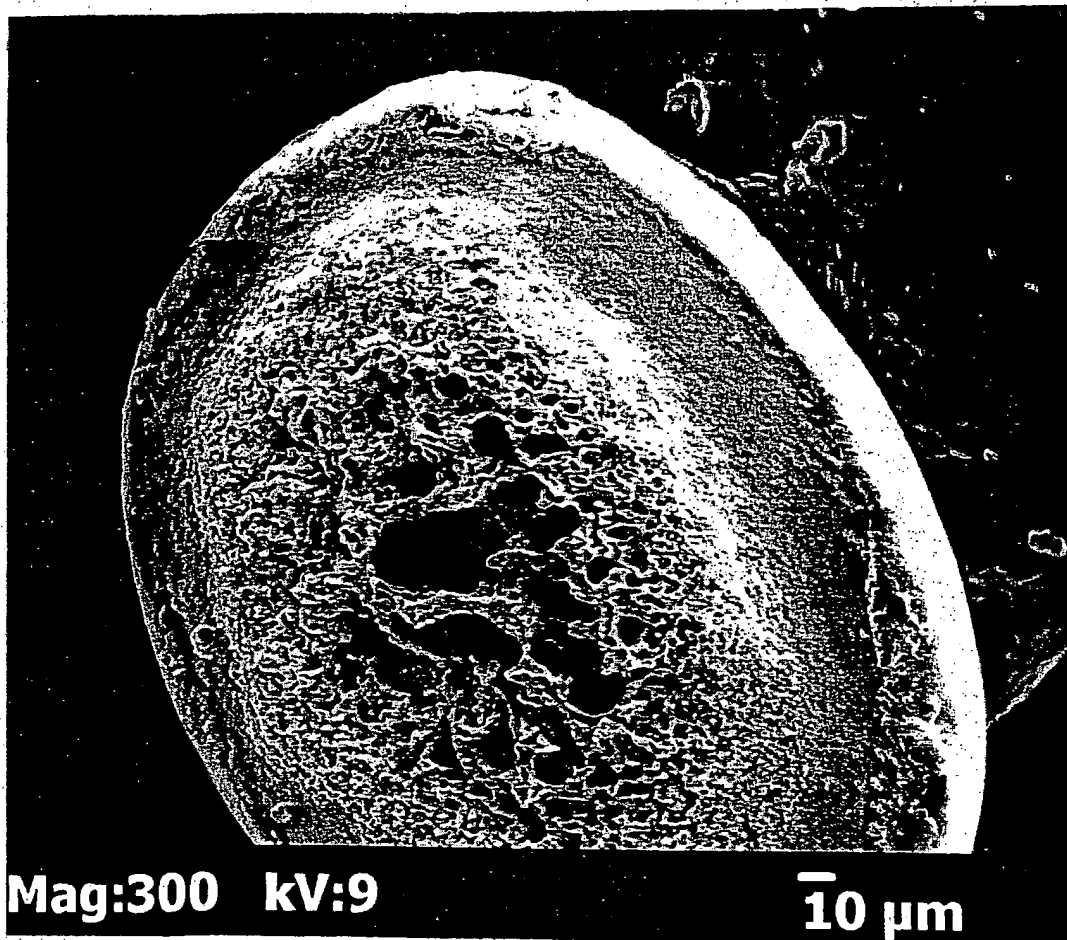


FIG. 3E

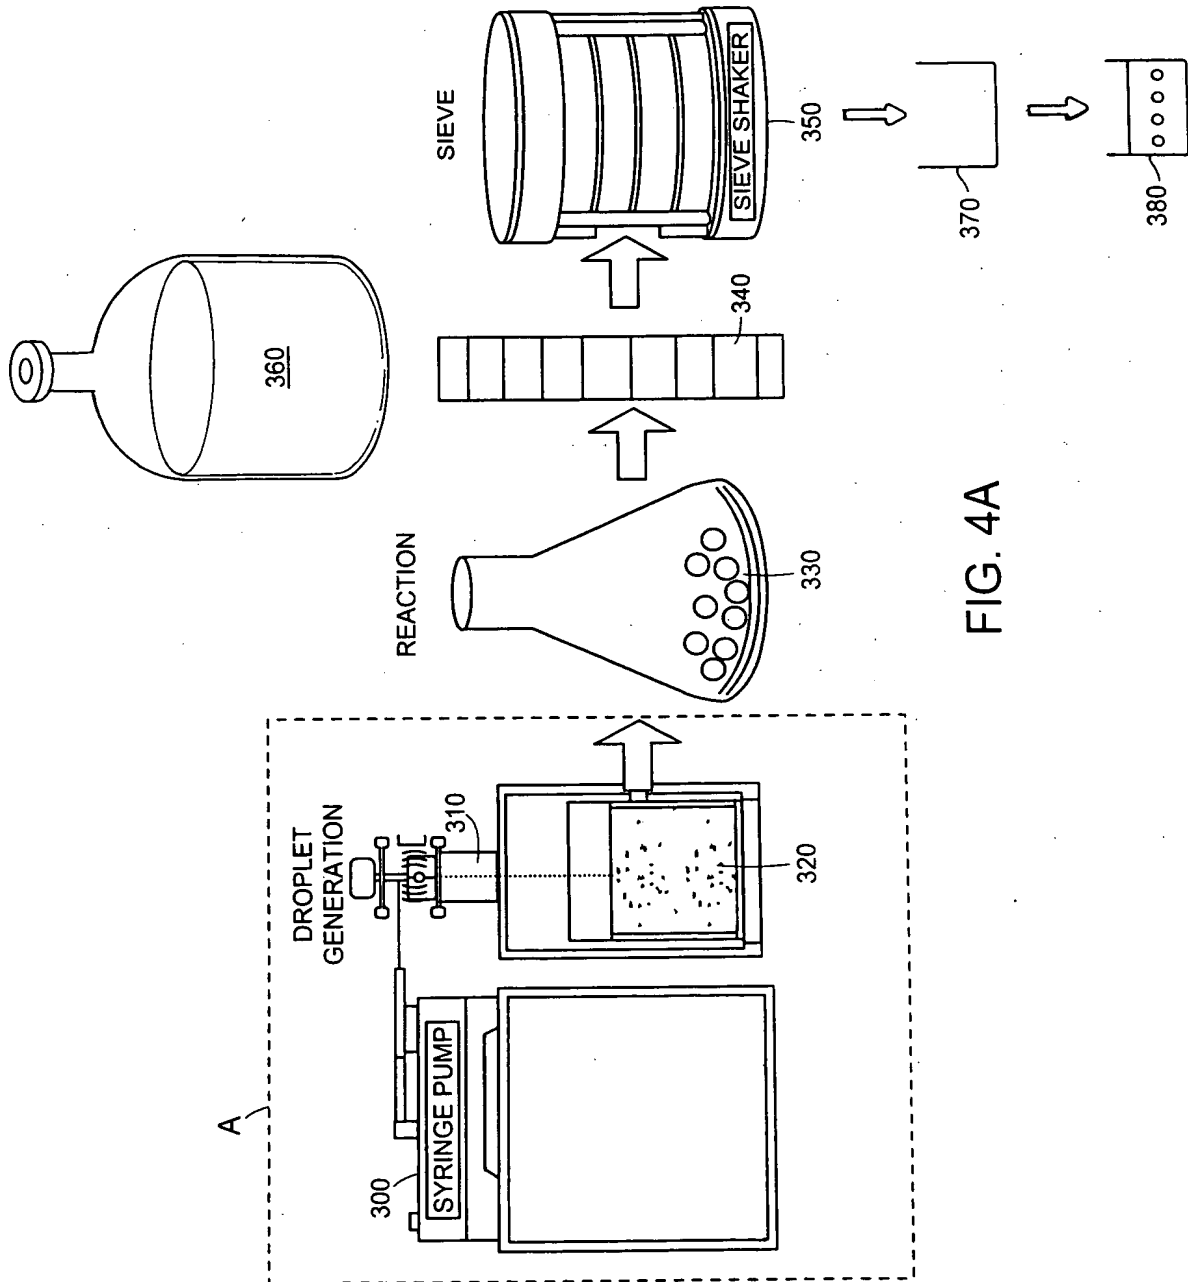


FIG. 4A




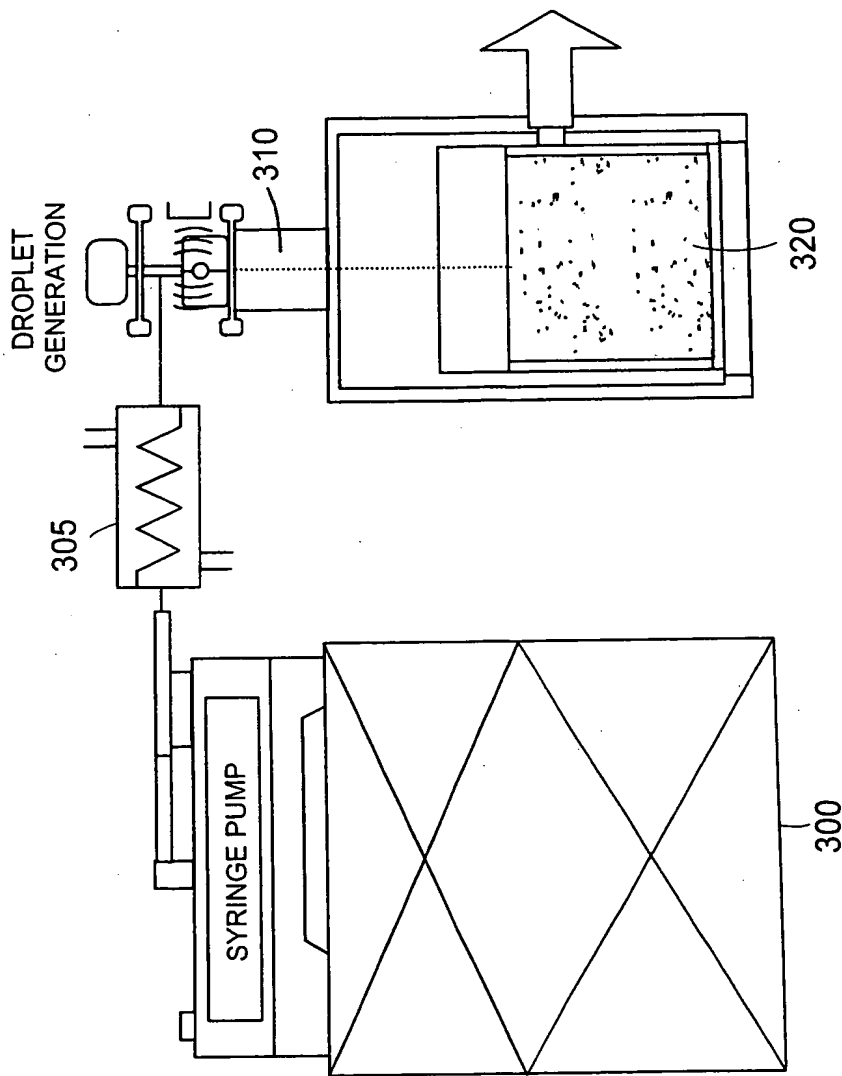



FIG. 5




14202 U.S. PTO

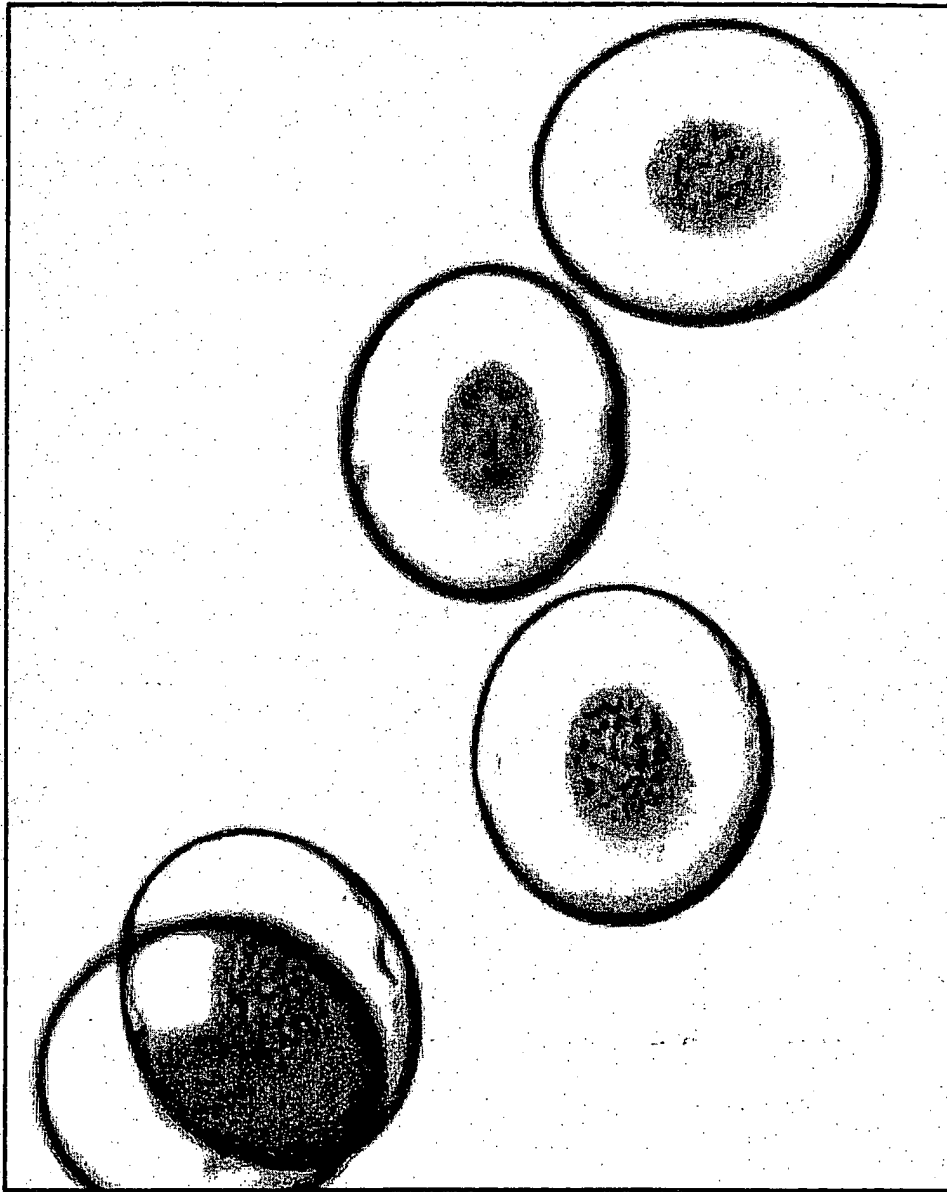

112403



ECA DIAMETER DIFFERENTIAL VOLUME  
600.0 - 1400.0 MICRONS

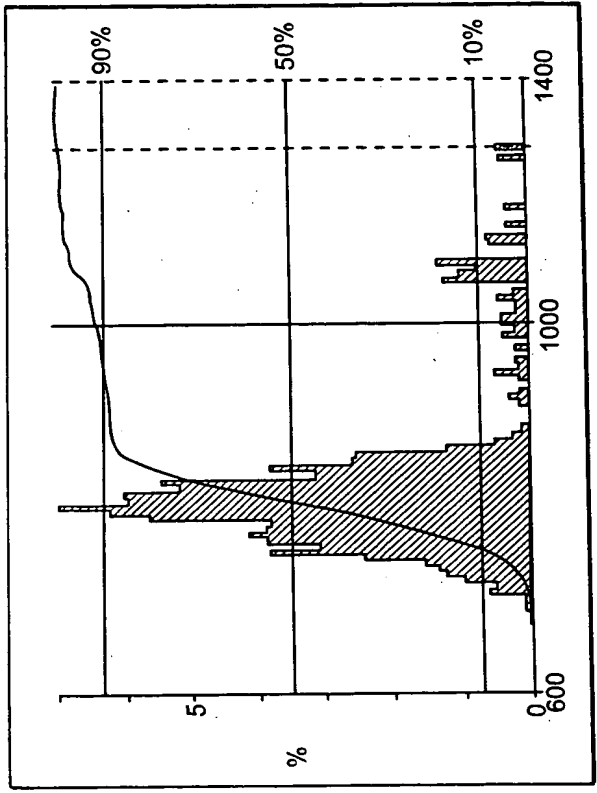

TOTAL COUNT	958
MEAN	810.7 MICRONS
STANDARD DEVIATION	102.4 MICRONS
COEFFICIENT OF VARIANCE	12.63%
HARMONIC MEAN	800.4 MICRONS
MODE	783.6 MICRONS
SKEWNESS	2.26
10%	730.2 MICRONS
25%	755.2 MICRONS
50%	785.8 MICRONS
75%	816.4 MICRONS
90%	954.1 MICRONS
PERCENT OF TOTAL	100.00%

FIG. 6